

## Precision XY Motion Platform

### FEATURES

- Compact Low-Profile Design
- 200mm XY Travel
- Zero backlash, precision ground ball screws
- Optical limit switches with home
- High resolution rotary encoder
- Brushless servo motor drive
- Crossed Roller Bearings



The CXY-BS series stages are designed for a variety of applications. This compact low profile ball screw stage is built for high duty cycles and long life and can attain high velocities for factory automation and semiconductor processing equipment. The CXY series offers extraordinary levels of orthogonality and parallelism resulting in high accuracy for combined axis motion. Recirculating ball linear ways and precision ground ball screws offer extremely smooth operation and velocity control. The XY stage can operate in any orientation and has optional brakes for added safety.




CXY-C-200-BS-A-H-S-0-00

## Motion Specifications

## Product Specifications

Encoder Output	A quad B, index
Force X/Y, Continuous (N)	165
Force X/Y, Peak (N)	330
Force Z (N)	400
Flatness ( $\mu\text{m}$ )	8
Height (mm)	66
Length (mm)	416
Limit Switches	Yes
Linear Accuracy, Calibrated ( $\mu\text{m}$ )	4*
Linear Accuracy, Mechanical ( $\mu\text{m}$ )	25
Linear Encoder Resolution ( $\mu\text{m}$ )	0.125
Linear Repeatability ( $\mu\text{m}$ )	2
Linear Velocity (mm/s)	140
Moment X (N-m)	110
Moment Y (N-m)	110
Moment Z (N-m)	75
Moving Mass X (kg)	11.61
Moving Mass Y (kg)	4.79
Orthogonality (arc-sec)	10
Pitch +/- (arc-sec)	15
Screw Lead (mm)	2
Stage Mass (kg)	17.93
Straightness ( $\mu\text{m}$ )	8
Width (mm)	361
Yaw +/- (arc-sec)	7
*Subject to control configuration	

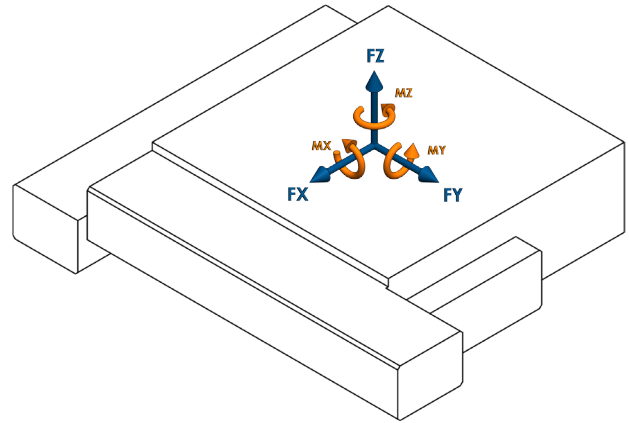


**LOAD DIRECTIONS**

## Part Number Description

CXY	CXY Series
C	No Aperture
200	200mm Travel
BS	Ball Screw Drive
A	Brushless Servo Motor
H	0.125 $\mu\text{m}$ Rotary
S	Standard Precision
0	No Additional Options
00	Standard Product (Call for custom)

CXY-C-200-BS-A-H-S-0-00


### Mechanical Specifications

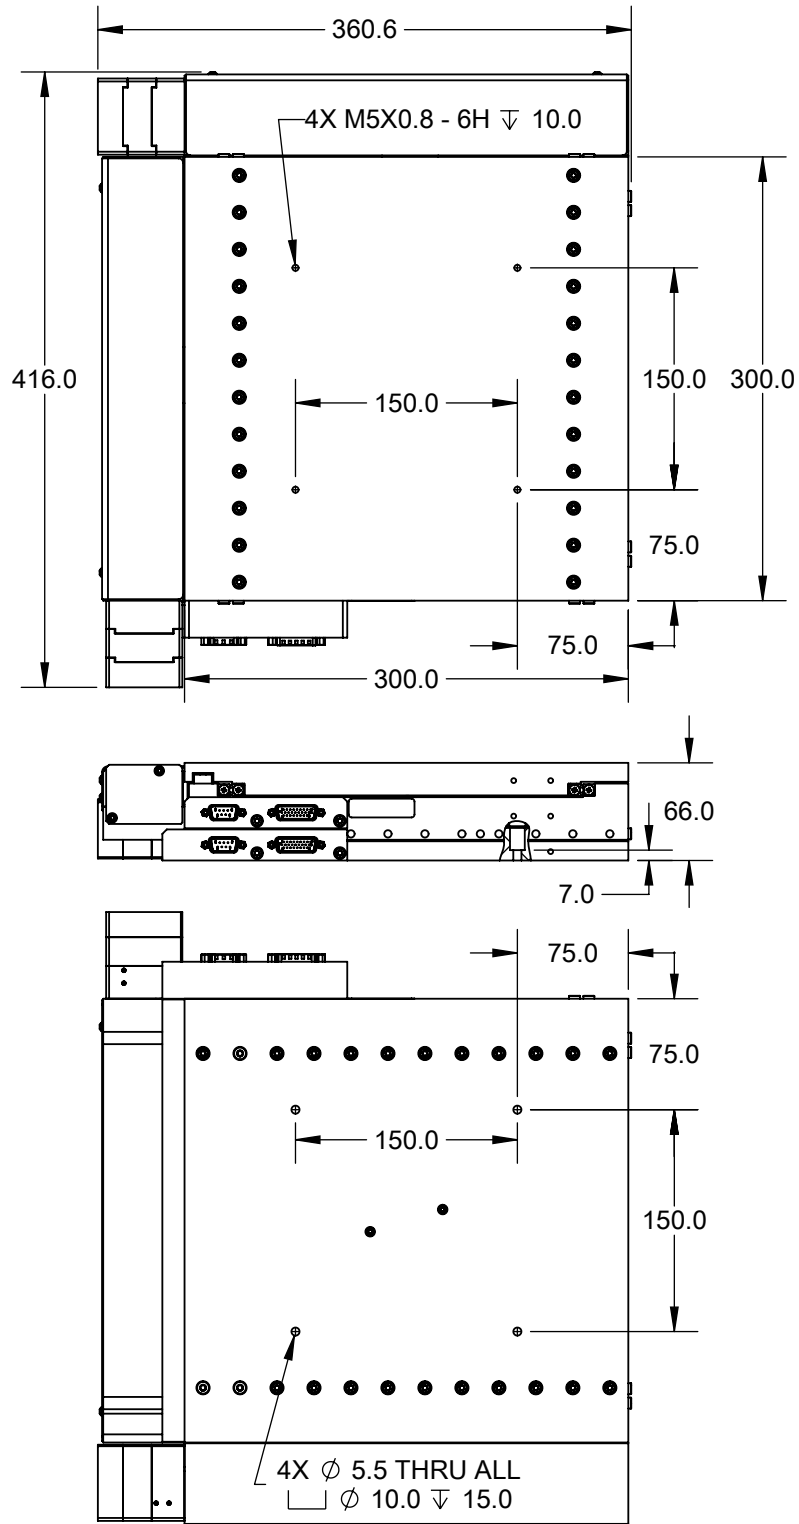

CXY-C-200-BS-A-H-S-0-00

Rev 1

Feedback Connector (DSUB26HD MALE)	
PIN	NAME
1	+5Vdc
2	A+
3	B+
4	RI+
5	LIM+
6	*
7	*
8	*
9	*
10	*
11	A-
12	B-
13	RI-
14	LIM-
15	*
16	*
17	*
18	*
19	GND
20	HALL A
21	HALL B
22	HALL C
23	HOME
24	*
25	*
26	*
*Reserved	

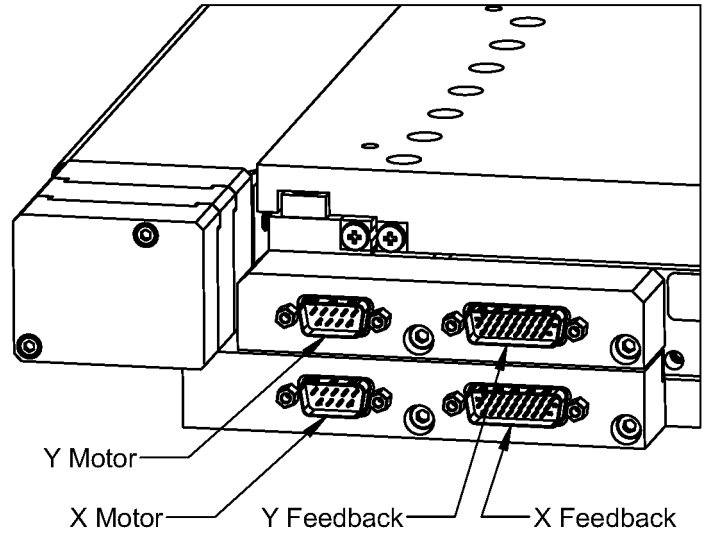

Motor Connector (DSUB9 MALE)	
PIN	NAME
1	PE
2	*
3	*
4	*
5	*
6	PHASE A
7	PHASE B
8	PHASE C
9	*
*Reserved	



**CXY-C-200-BS-A-H-S-0-00**

**Encoder Output**

Motor Specifications	
Motor Type	3 phase brushless DC
BEMF Output (V/Krpm)	2.57
Electrical Time Constant (msec)	0.38
Bus Voltage (Vdc)	24 nominal (100 max)
Max Continuous Current (A <sub>pk</sub> )	3.36
Motor Force Constant (Nm/A <sub>pk</sub> )	0.0216
Peak Current (A <sub>pk</sub> )	6.73
Pin to Pin Inductance (mH)	0.55
Pin to Pin Resistance (ohm)	1.51
Poles Per Revolution	6

Feedback Specifications	
Supply Voltage (Vdc)	5.0 ± 10%
Supply Current (mA)	250
Encoder Feedback	Yes
Encoder Type	Incremental
Encoder Output	Square Wave Quadrature, RS-422 compatible, A,B,Z, Differential Pair
Encoder Resolution	8000 cts/mm
Hall Switches	Yes
Hall Switch Output Type	Open-collector, no internal pullup resistor
Hall Switch max current (mA)	-20
Limit Switches	Yes
Limits Switch Output Type	CMOS
Limit Switch Output current (mA)	± 20.0
Home Switch	Yes
Home Switch Output Type	CMOS
Home Switch Output Current (mA)	± 20.0

A home switch is provided near the center of mechanical travel, and a limit switch at each end of travel. The encoder will output one index pulse per revolution of the motor. The index pulse is highly repeatable and can be used in coordination with the home switch to find an absolute position after power-up.

The limit switches will be pulled low throughout the travel range of the stage. The output will swing high at the end of travel and remain high until the mechanical limit of the stage is reached.