

## Precision Z Motion Platform

### FEATURES

- 25mm Z Travel
- High rigidity wedge design
- Zero backlash, precision ground ball screw
- Optical limit switches with home
- High resolution linear encoder
- Brushless servo motor drive
- Crossed Roller Bearings



The ELV-BS series stages are designed for a variety of applications. These reliable ball screw stages combine high speed and high accuracy and are built for high duty cycles and long life for laboratory, factory automation and semiconductor processing equipment. They are safe for upright or inverted use and can be configured with custom payload mounting holes. The wedge design and crossed roller bearings offer an extremely rigid Z stage.




PO BOX 1298 | HOLLY SPRINGS, NC 27540  
P: 866.906.2709 | F: 919.882.1430  
www.griffinmotion.com

ELV-025-BS-D-M-S-0-00

## Motion Specifications

## Product Specifications

Encoder Output	A quad B, index
Force X (N)	200
Force Y (N)	200
Force Z (N)	200
Height (mm)	125
Length (mm)	288
Limit Switches	Yes
Linear Accuracy ( $\mu\text{m}$ )	5
Linear Encoder Resolution ( $\mu\text{m}$ )	0.1
Linear Repeatability ( $\mu\text{m}$ )	1
Linear Velocity (mm/s)	35
Moment X (N-m)	10
Moment Y (N-m)	10
Moment Z (N-m)	10
Moving Mass Z (kg)	3.6
Pitch +/- (arc-sec)	10
Screw Lead (mm)	2
Stage Mass (kg)	10.7
Width (mm)	191
Yaw +/- (arc-sec)	10

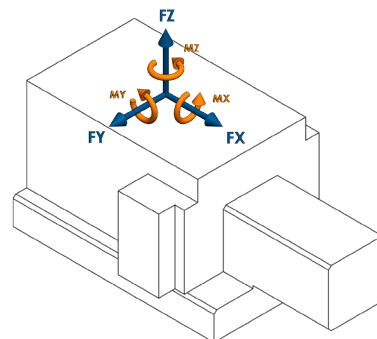


LOAD DIRECTIONS

## Part Number Description

ELV	ELV Series
025	25mm Travel
BS	Ball Screw Drive
D	High Torque Brushless Servo Motor
M	0.1 $\mu\text{m}$ Linear SS Scale
S	Standard Precision
0	No Additional Options
00	Standar Product (Call for custom)

ELV-025-BS-D-M-S-0-00

## Mechanical Specifications

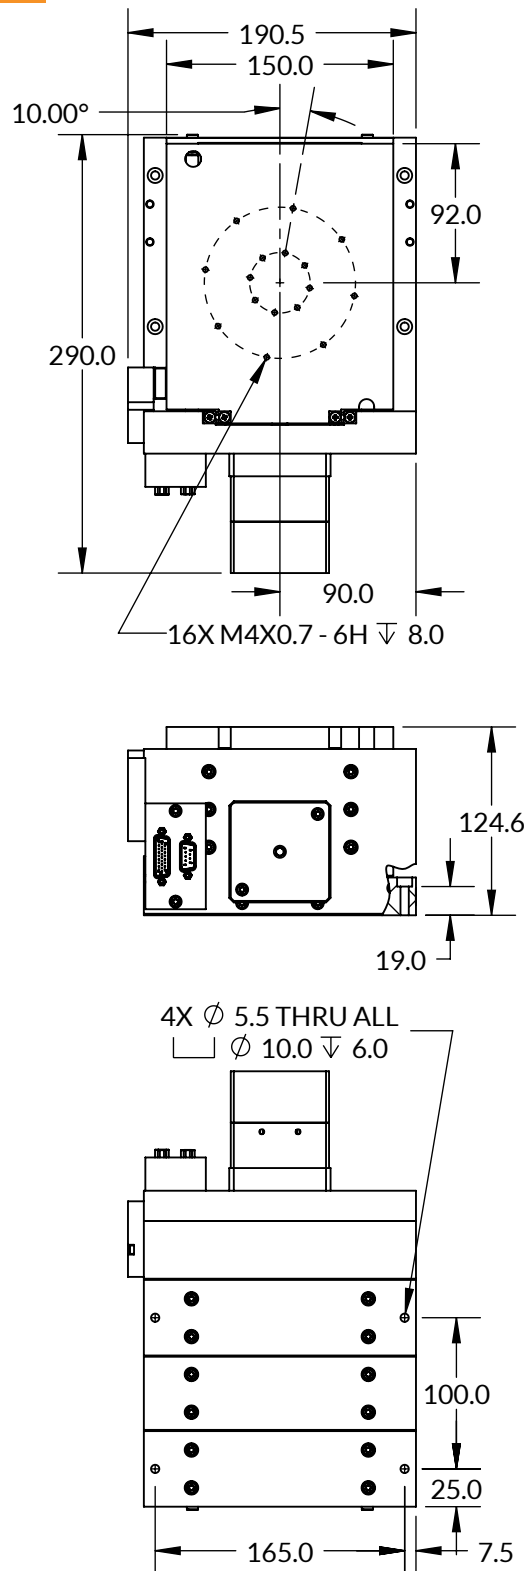


ELV-025-BS-D-M-S-0-00

Rev 6

ELV-025-BS-D-M-S-0-00

## Electrical Pinout

Feedback Connector (DSUB26HD MALE)	
PIN	NAME
1	+5V
2	A+
3	B+
4	RI+
5	LIM+
6	*
7	*
8	*
9	*
10	*
11	A-
12	B-
13	RI-
14	LIM-
15	*
16	*
17	*
18	*
19	GND
20	HALL A
21	HALL B
22	HALL C
23	*
24	*
25	*
26	*
* Reserved	

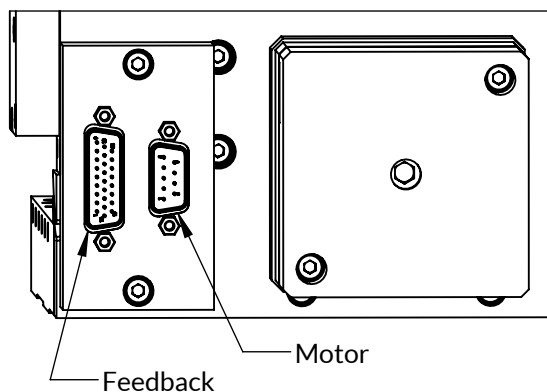

Motor Connector (DSUB9 MALE)	
PIN	NAME
1	*
2	*
3	*
4	*
5	*
6	PHASE A
7	PHASE B
8	PHASE C
9	*
* Reserved	



ELV-025-BS-D-M-S-0-00

## Electrical Specifications

Motor Specifications	
Motor Type	3 $\Phi$ Brushless DC
BEMF Constant (V/KRPM)	5.0
Electrical Time Constant (ms)	0.94
Max Bus Voltage (VDC)	40
Max Continuous Current (A)	0.73
Motor Force Constant (N/A)	135
Peak Current (A)	2.43
Pin to Pin Inductance (mH)	0.38
Pin to Pin Resistance (ohm)	0.40
Poles per Revolution	6

Feedback Specifications	
Supply Voltage (V)	5.0 $\pm$ 10%
Supply Current (mA)	200
Encoder Feedback	Yes
Encoder Type	Incremental
Encoder Output	Square Wave Quadrature, RS-422 compatible, A,B,Z, Differential Pairs
Encoder Resolution	10000 cts/mm
Hall Switch Output	Open-collector, no internal pullup resistor
Hall Switch max current (mA)	-20
Limit Switches	Yes
Limit Switch Output Type	Open-collector, no internal pullup resistor
Limit Switch Output current (mA)	-20.0
Limit Switch Output Low (V)	0.8

The encoder will output one index pulse near center travel. This pulse is highly repeatable and can be used upon power-up to find an absolute position to use for further measurements.

Two limit switches are provided at the ends of travel. The limit switches will be pulled low throughout the travel range of the stage. The output will swing to high-impedance at the end of travel and remain high-impedance until the mechanical limit of the stage is reached.