

Precision XY Motion Platform

FEATURES

- Compact Low-Profile Design
- 300mm XY Travel
- Zero backlash, precision ground ball screws
- Optical limit switches with home
- High resolution linear encoder
- Stepper motor
- Recirculating ball linear ways



The CXY-BS series stages are designed for a variety of applications. This compact low profile ball screw stage is built for high duty cycles and long life and can attain high velocities for factory automation and semiconductor processing equipment. The CXY series offers extraordinary levels of orthogonality and parallelism resulting in high accuracy for combined axis motion. Recirculating ball linear ways and precision ground ball screws offer extremely smooth operation and velocity control. The XY stage can operate in any orientation and has optional brakes for added safety.




1040 CLASSIC ROAD | APEX, NC 27539
P: 866.906.2709 | F: 919.882.1430
www.griffinmotion.com

CXY-C-300-BS-B-M-S-0-00

Motion Specifications

Product Specifications

Encoder Output	A quad B, index
Force X (N)	200
Force Y (N)	200
Force Z (N)	400
Flatness (μm)	10
Height (mm)	80
Length (mm)	580
Limit Switches	Yes
Linear Accuracy (μm)	20
Linear Encoder Resolution (μm)	0.1
Linear Repeatability (μm)	1
Linear Velocity (mm/s)	150
Moment X (N-m)	300
Moment Y (N-m)	300
Moment Z (N-m)	100
Moving Mass X (kg)	28.08
Moving Mass Y (kg)	13.55
Orthogonality (arc-sec)	10
Pitch +/- (arc-sec)	20
Screw Lead (mm)	2
Stage Mass (kg)	42.68
Straightness (μm)	10
Width (mm)	544
Yaw +/- (arc-sec)	15

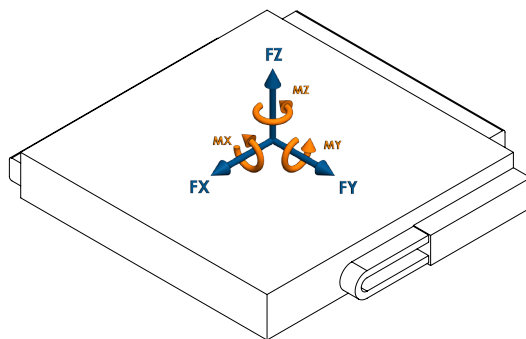


LOAD DIRECTIONS

Part Number Description

CXY	CXY Series
C	No Aperture
300	300mm Travel
BS	Ball Screw Drive
B	Stepper Motor
M	0.1 μm Linear SS Scale
S	Standard Precision
0	No Additional Options
00	Standard Product (Call for custom)




Mechanical Specifications

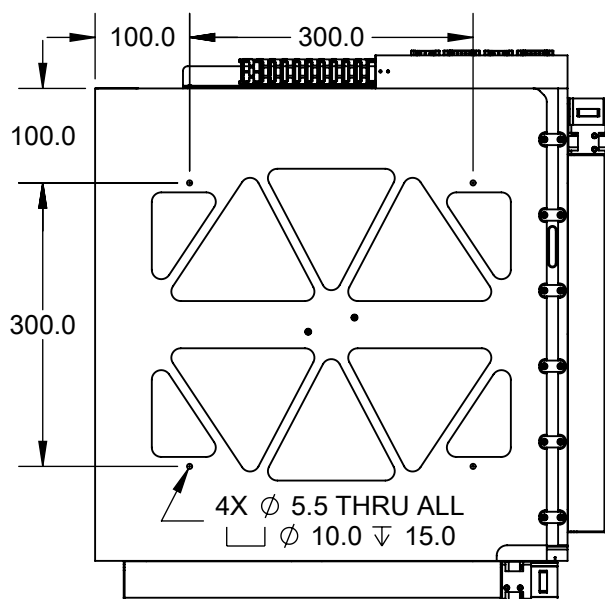

Rev 2

Feedback Connector (DSUB26HD MALE)	
PIN	NAME
1	+5V
2	A+
3	B+
4	RI+
5	LIM+
6	*
7	*
8	*
9	*
10	*
11	A-
12	B-
13	RI-
14	LIM-
15	*
16	*
17	*
18	*
19	GND
20	*
21	*
22	*
23	*
24	*
25	*
26	*
* Reserved	

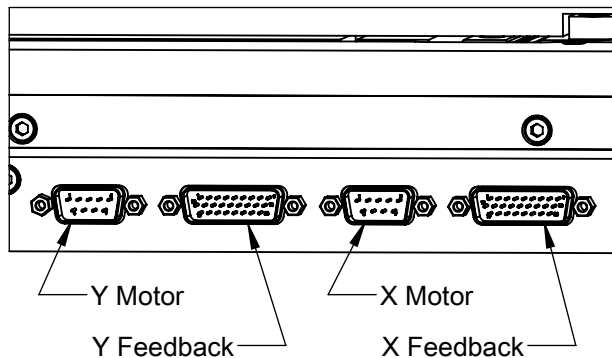

Motor Connector (DSUB9 MALE)	
PIN	NAME
1	*
2	*
3	*
4	*
5	*
6	PHASE A+
7	PHASE A-
8	PHASE B+
9	PHASE B-
* Reserved	



CXY-C-300-BS-B-M-S-0-00

Electrical Specifications

Motor Specifications	
Motor Type	Bipolar Stepper
Current/phase (A)	0.8
Resistance/phase (Ω)	10.0
Induction/phase(mH)	6.9

Feedback Specifications	
Supply Voltage (V)	5.0 $\pm$ 10%
Supply Current (mA)	200
Encoder Feedback	Yes
Encoder Type	Incremental
Encoder Output	Square Wave Quadrature, RS-422 compatible, A,B,Z, Differential Pairs
Encoder Resolution	10000 cts/mm
Home Switch	No
Limit Switches	Yes
Limit Switch Output Type	Open-collector, no internal pullup resistor
Limit Switch Output current (mA)	-20.0
Limit Switch Output Low (V)	0.8

The encoder will output one index pulse near center travel. This pulse is highly repeatable and can be used upon power-up to find an absolute position to use for further measurements.

Two limit switches are provided at the ends of travel. The limit switches will be pulled low throughout the travel range of the stage. The output will swing to high-impedance at the end of travel and remain high-impedance until the mechanical limit of the stage is reached.