


Precision Rotary Collet Stage

FEATURES

- Continuous 360° rotation
- High resolution encoder
- Brushless DC motor
- Ø 16.00mm through bore
- Spring close, pneumatic open collet
- Accepts ER25 type collets

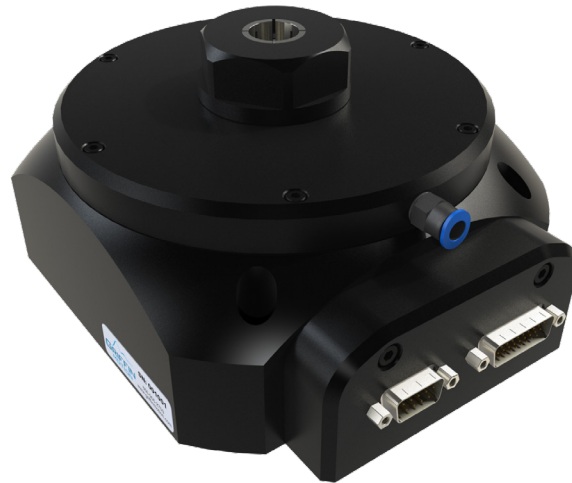

The RCS series rotary stages are designed for precise positioning and workholding to suit a variety of applications. The brushless direct drive technology eliminates backlash and improves reliability by eliminating sliding friction throughout the stage. The pneumatic open, spring close system allows for a range of collet sizes with exceptional runout capability.




1040 CLASSIC ROAD | APEX, NC 27539
P: 866.906.2709 | F: 919.882.1430
www.griffinmotion.com

RCS-150-A-C-ER25-00

Motion Specifications

Product Specifications

Air Pressure Range (PSI)	60-90
Air Quality Required	Dry Air, 1 μ m Maximum Particulate Size
Angular Accuracy +/- (arc-sec)	30
Angular Repeatability +/- (arc-sec)	4
Angular Velocity (deg/s)	3600
Collet Type	ER25
Encoder Output	A quad B, index
Height (mm)	95.2
Length (mm)	170
Maximum Aperture (mm)	16
Peak Torque (Nm)	3.8
Radial Runout of gage pin in collet (μ m)	<30
Rotational Inertia (kg-m ²)	0.002465
Stage Mass (kg)	3.6
Travel Range (deg)	360
Through Bore (mm)	16
Width (mm)	150

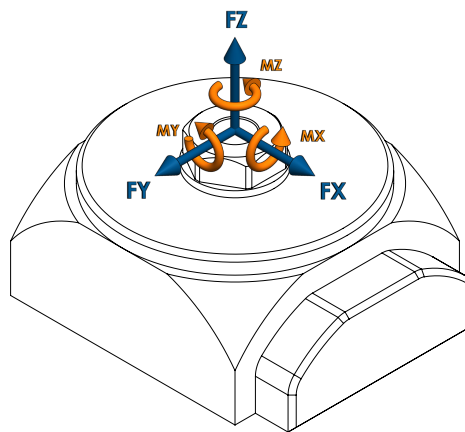


LOAD DIRECTIONS

Part Number Description

RCS	RCS Series
150	150mm Diameter
A	Brushless Motor
C	Glass Disk, 18000 Line Pairs
ER25	Accepts ER25 Collets
0	No Additional Options
00	Standard Product (Call for custom)

RCS-150-A-C-ER25-00


Mechanical Specifications

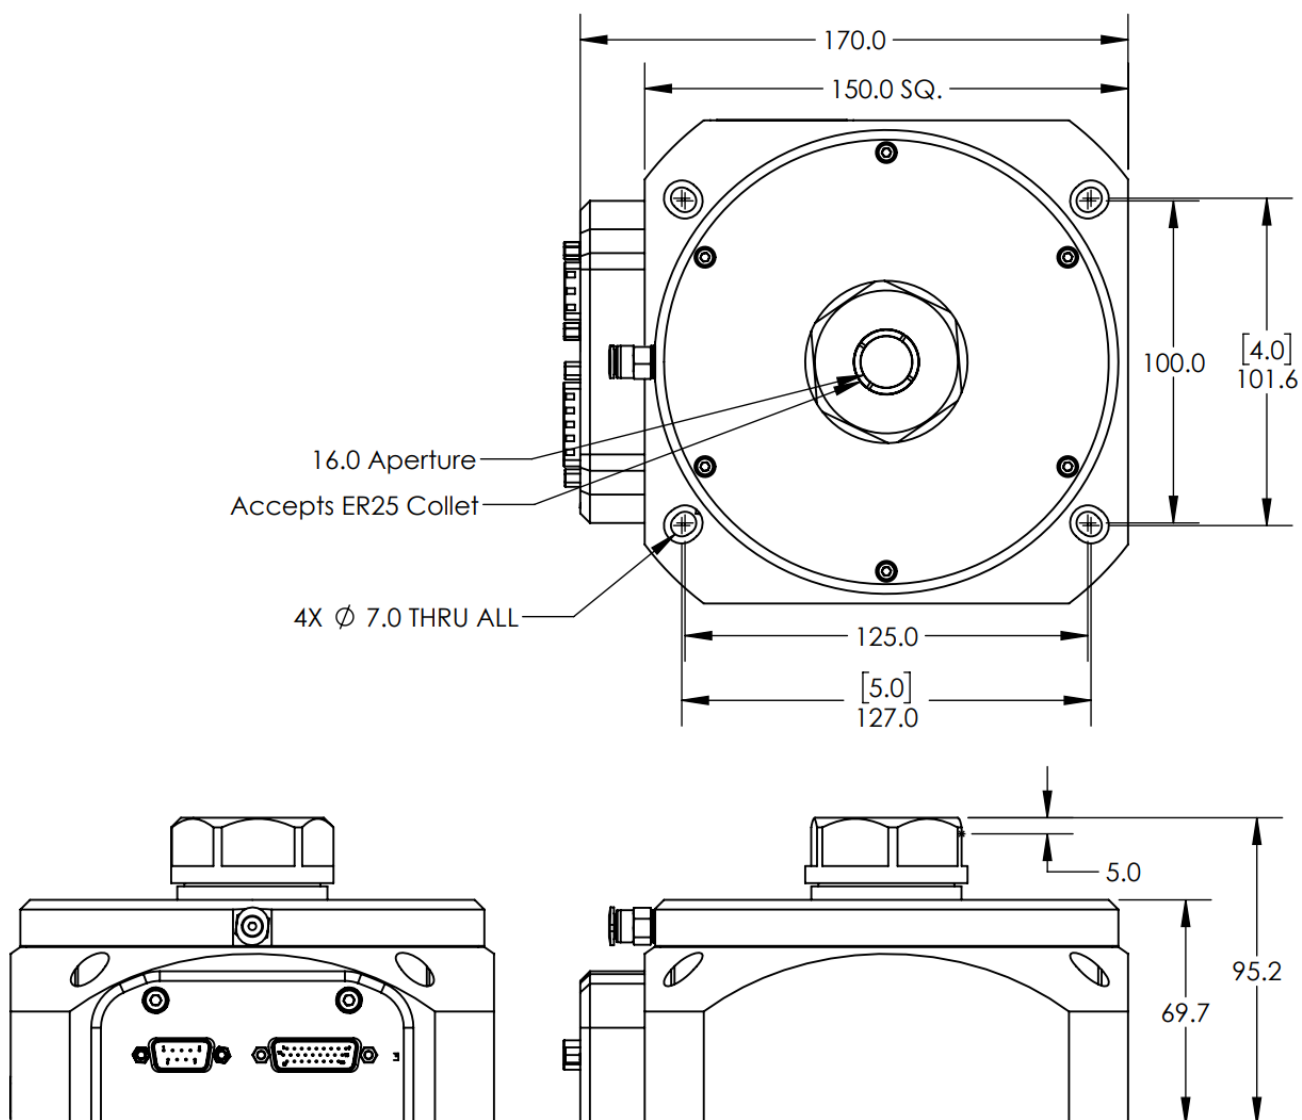

RCS-150-A-C-ER25-00

Electrical Pinout

Feedback Connector (DSUB26HD MALE)	
PIN	NAME
1	+5V
2	SIN+
3	COS+
4	INDEX+
5	*
6	*
7	*
8	*
9	*
10	TEMP
11	SIN-
12	COS-
13	INDEX-
14	*
15	*
16	*
17	*
18	*
19	GND
20	HALL A
21	HALL B
22	HALL C
23	*
24	*
25	*
26	*
* Reserved	

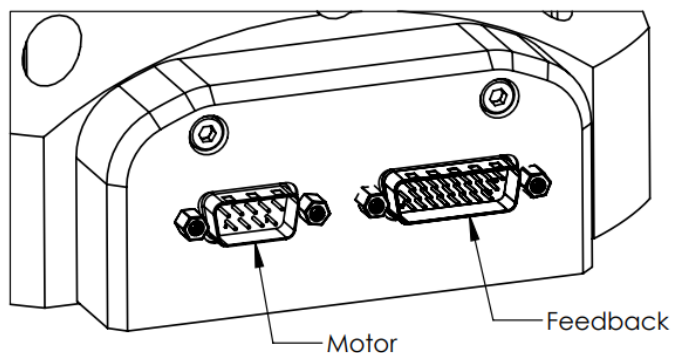

Motor Connector (DSUB9 MALE)	
PIN	NAME
1	*
2	*
3	*
4	*
5	*
6	PHASE A
7	PHASE B
8	PHASE C
9	*
* Reserved	



RCS-150-A-C-ER25-00

Electrical Specifications

Motor Specifications	
Motor Type	3 Φ Brushless DC
BEMF Constant (V/KRPM)	50.0
Electrical Time Constant (ms)	1.9
Max Bus Voltage (VDC)	340
Max Continuous Current (A_p)	6.26
Motor Torque Constant ($N \cdot m/A$)	0.410
Peak Current (A_p)	10.69
Pin to Pin Inductance (mH)	7.48
Pin to Pin Resistance (ohm)	3.86
Poles per Revolution	28

Feedback Specifications	
Supply Voltage (V)	5.0 $\pm$ 10%
Supply Current (mA)	250
Encoder Feedback	Yes
Encoder Type	Incremental
Encoder Output	1Vpp Sinusoidal; Sin, Cos, Index; Differential Pairs
Hall Switch Output	Open-Collector, No Pullup Resistor
Hall Switch max current (mA)	-20
Limit Switches	No

The encoder has one index mark. It will output a pulse once per revolution when this index mark is passed. This pulse is highly repeatable and can be used to find an absolute position (within one revolution of the output shaft) upon power-up.